

Cobolt Rogue™ Series

High Power | CW Diode pumped lasers




Applications

- Widefield fluorescence microscopy
- Flow cytometry
- Super-resolution microscopy
- DNA sequencing
- High content analysis

- 640 nm
- CW output power up to 1 W
- Spectral bandwidth < 150 GHz (200 pm)
- Perfect TEM₀₀ beam
- Stable output power < 2 % peak-to-peak over 8 hours
- Ultra-robust, hermetically sealed packages

Typical Beam Profile




Cobolt Rogue™ 640 nm
M² < 1.1

Cobolt Rogue™ Series lasers are continuous-wave diode pumped lasers (DPL) operating at a fixed wavelength. The lasers are built using proprietary HTCure™ manufacturing technology for ultra-robustness in a compact hermetically sealed package.

As a complement to our Cobolt 05-01 Series of single frequency lasers, the Cobolt Rogue™ Series lasers have higher optical power and a spectral bandwidth of < 150 GHz. The lasers emit a very high quality laser beam with stable characteristics over a wide range of operating conditions, they are designed and manufactured to ensure a high level of reliability.

Cobolt Rogue™ Series lasers are intended for stand-alone use in laboratory environments or for integration as OEM components in instruments for applications including fluorescence microscopy, flow cytometry, DNA sequencing and High content analysis.

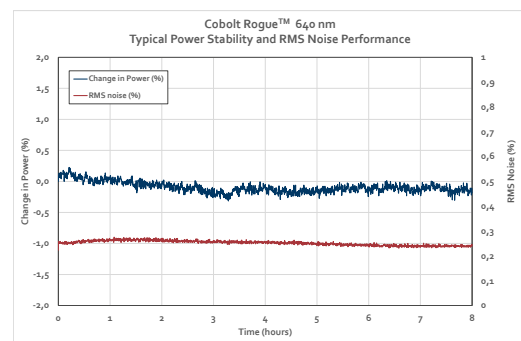

HÜBNER Photonics




Cobolt Rogue™ Series

Performance Specifications

Center wavelength	639.6 ± 0.3 nm
Available Power Levels	1.0 W
Noise, 20 Hz - 20 MHz (rms)	< 0.5 %
Power stability (8 hrs ± 3°C)	< 2%
Beam divergence (full angle)	< 1.4 mrad
Spatial mode (TEM ₀₀)	M ² < 1.1
Beam diameter at aperture	700 ± 50 μm
Spectral bandwidth (FWHM)	< 150 GHz (200 pm)
Beam symmetry at aperture	> 0.90:1
Beam pointing stability (over 10-40°C)	< 10 μrad/°C
Polarization ratio (linear, vertical)	> 100:1
Warranty	12 months, unlimited hours

Operational Environment

Power supply requirements	15 VDC, 6 A
Maximum laser head baseplate temperature	45 °C
Ambient temperature, operation	10 - 35 °C
Ambient temperature, storage	-10 -> +60 °C
Humidity	0 - 90 % RH non-condensing
Ambient Air pressure	950 - 1050 mbar
Laser head heat sink thermal impedance at 35°C ambient	0.18 K/W
Maximum heat dissipation of Laser Head	< 63 W, typical 30W



Cobolt Rogue™ Series laser on a heat sink for fiber coupling (FIC-04)

Model Number

WWW-05-41-PPPP-CCC

Wavelength ↑ Power ↑ Configuration:

500 = Gen 5b Controller, RS-232, CE / CDRH
 600 = Gen 5b Controller, RS-232, OEM
 700 = Gen 5b Controller, USB, CE / CDRH
 800 = Gen 5b Controller, USB, OEM
 xxx = OEM customization



This device contains components that may be sensitive to Electrostatic Discharge (ESD). ESD protection can be achieved with proper electrical grounding.



Avoid eye or skin exposure to direct or scattered radiation.
 Class 4 Laser Product
 Classified per IEC 60825-1:2014

Wvl (nm)	Max.Pwr (mW)
640	2000




Communication Interface

Communication	USB or RS-232
Standard Baudrate	115200


Cobolt Rogue™ Series

Mechanical Specifications


Laser head

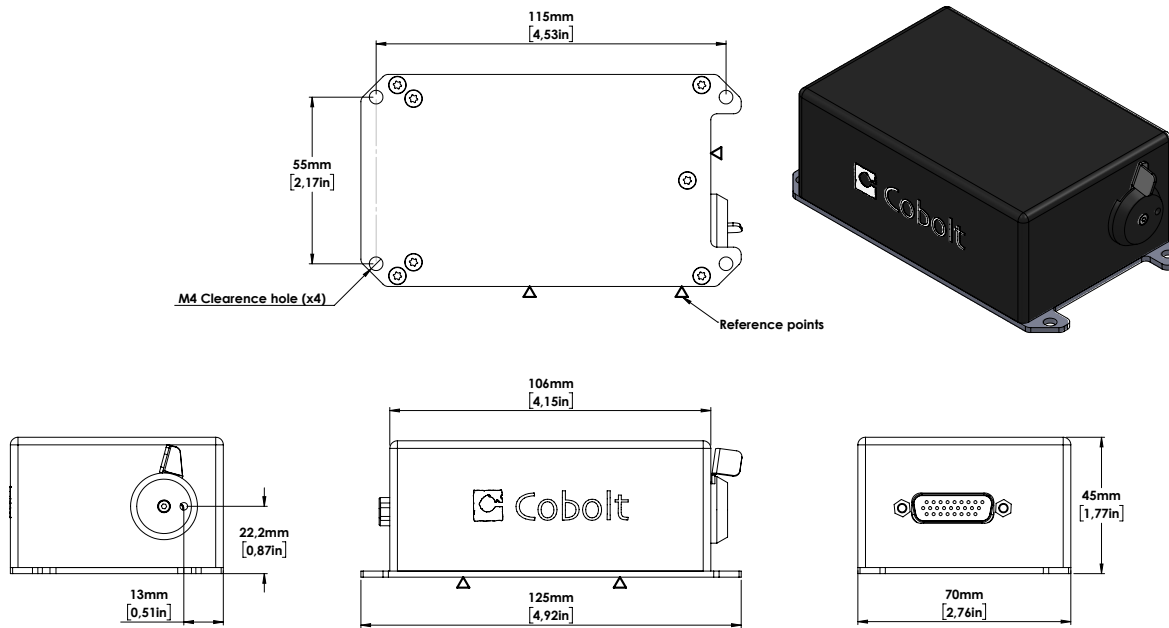

Controller

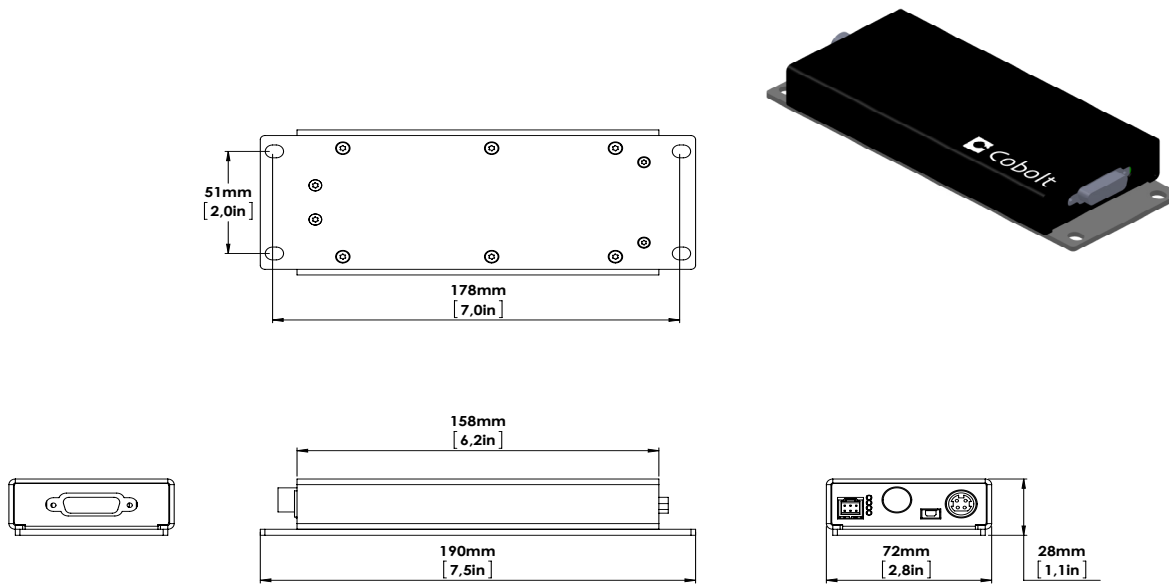

Electrical Interfaces

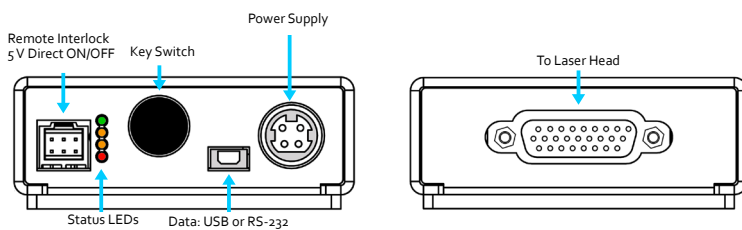

Molex 6 pin - Controller I/O

Pin	Function
1	Remote interlock
2	0V – Ground
3	Direct On/Off (+5V Input)
4	--
5	LED 1 (LASER ON)
6	LED 2 (ERROR)


Cobolt Rogue™ Series

Options and Accessories

- Laser head heatsink with fans HS-04
- TEC Plate for active baseplate temperature control
- Laser head heatsink with fans for fiber coupling FIC-04



Heatsink with fans HS-04

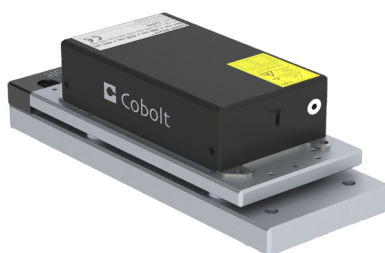

TEC-Plate for active baseplate temperature control



Heat sink with fans for fiber coupling FIC-04

Manufacturing Sites

Cobolt AB
(Sales in Sweden, Norway, Finland and Denmark)
Solna, Sweden
Phone: +46 8 545 912 30
Fax: +46 8 545 912 31
E-mail: info@coboltlasers.com

Hübner Photonics
(Sales in Germany, Switzerland and Austria)
Kassel, Germany
Phone: +49 6251 770 6686
Fax: +49 6251 860 9917
E-mail: sales@hubner-photonics.com

www.hubner-photonics.com

Direct Sales Offices

HÜBNER Photonics Inc.
(Sales in USA, Canada and Mexico)
2635 North First Street, Suite 228
San Jose, California, USA
Phone: +1 (408) 708 4351
Fax: +1 (408) 490 2774
E-mail: info.usa@hubner-photonics.com

HÜBNER Photonics UK
(Sales in UK & Ireland)
Royal Mail House, Terminus Terrace
Southampton, Hampshire SO14 3FD
United Kingdom
Phone: +44 2380 438701
E-mail: info.uk@hubner-photonics.com

Find local sales representatives at www.coboltlasers.com/contact-us

Australia, Benelux, Brazil, China, Estonia, Latvia, Lithuania, France, India, Israel, Italy, Japan, Poland, Russia, Belarus, Singapore, Malaysia, Thailand, South Korea, Spain and Portugal, Taiwan

